



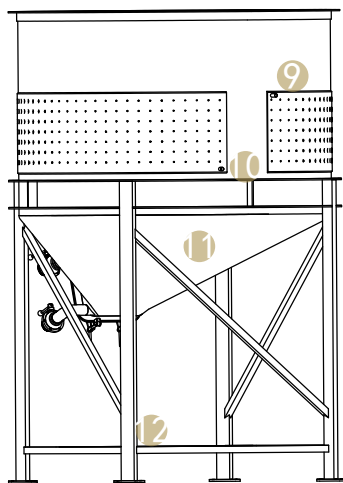

## OPEN TOP FERMENTER (OTF-C)

# OPEN TOP FERMENTER (OTF-C)

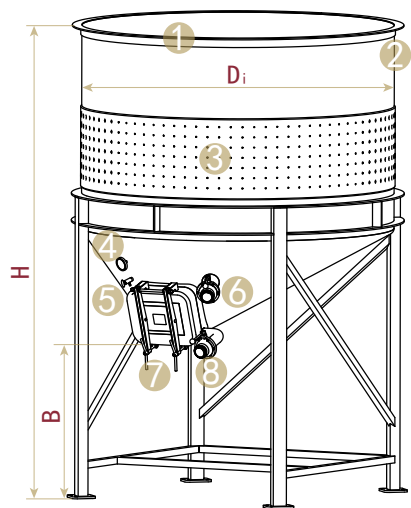

## 1 Top Angle Bar

## 2 Tank Wall

## 3 Dimple Preformed Jacket

OLAVIN specially fabricated new generation jackets have 15% more service life than its previous generation.

★ **Spiral Cooling Channels** are available.

## 4 Thermometer & Thermowell

Measuring range -20 °C ~+80 °C

## 5 Sample Valve

OLAVIN improved sample valve, no blocking nor foam are created when sampling.

## 6 Racking Valve

## 7 Mash Door

Size 535×413mm, with outwards opening door

## 8 Drainage Valve

## 9 Coolant Outlet

## 10 Coolant Inlet

## 11 Offset Conical Bottom

3D models for accurate laser cutting, the inner surface is continuously smoothed and rounded, the shape is not deformed when fully loaded.

## 12 Supporting Legs & Braces

Capacity Tonne	Di mm	B mm	H mm
3.0	1700	650	2580
5.0	2300	950	3050
10	2600	950	3600
15	3350	950	3700
20	3350	950	4350

★ **Customization Available**

✓ **Material** SS304 or SS316

✓ **Outer Surface** Oil brushed

✓ **Inner Surface** 2B

✓ **ANSYS Seismic Analysis**

Want to keep updated with our latest product information? Visit [www.olavin.com](http://www.olavin.com) or contact us at [info@olavin.com](mailto:info@olavin.com)

[www.olavin.com](http://www.olavin.com)