



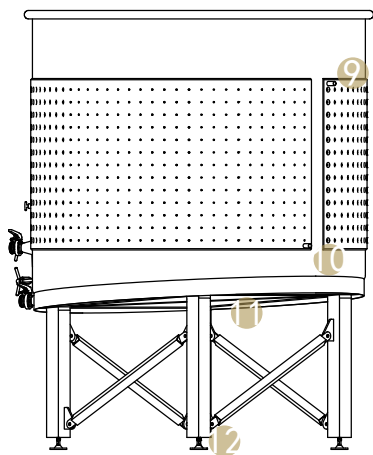

## OPEN TOP FERMENTER (OTF-S)

# OPEN TOP FERMENTER (OTF-S)

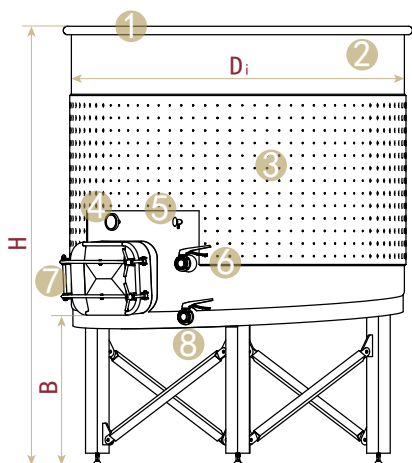

## 1 Rolling Tube

## 2 Tank Wall

## 3 Dimple Preformed Jacket

OLAVIN specially fabricated new generation jackets have 15% more service life than its previous generation.

★ **Spiral Cooling Channels** are available.

## 4 Thermometer & Thermowell

Measuring range -20 C ~+80 C

## 5 Sample Valve

OLAVIN improved sample valve, no blocking nor foam are created when sampling.

## 6 Racking Valve

## 7 Mash Door

Size 535×413mm, with outwards opening door

## 8 Drainage Valve

## 9 Coolant Outlet

## 10 Coolant Inlet

## 11 Slope Bottom

## 12 Supporting Legs & Braces

Capacity Tonne	Di mm	B mm	H mm
2.0	1450	650	2150
5.0	1950	950	2950
10	2400	950	3670
15	2800	950	3950
20	3200	950	3950

✓ **Material** SS304 or SS316

✓ **Outer Surface** Oil brushed

✓ **Inner Surface** 2B

✓ **ANSYS Seismic Analysis**

★ **Customization Available**